

- 200 W.O.G.
- Conforms to BS 5154
- Screwed Ends & CxC



NSF 61-8

(F1151S - F1152S only)

NOMENCLATURE AND MATERIALS


NO.	PART	MATERIAL	SPEC.JIS	SPEC.ASTM
1	COVER	CAST BRASS	YBSC3	B584-C85700
		CAST BRONZE	BC1	B584-C84400
2	BODY	CAST BRASS	YBSC3	B584-C85700
		CAST BRONZE	BC1	B584-C84400
3	DISC	FORGED BRASS	C3771B	B124-C37700
		CAST BRONZE	BC1	B584-C84400
4	PIN	BRASS	C3604B	B16-C36000
5	SCREW	BRASS	C3604B	B16-C36000

DIMENSIONS-QUANTITIES


**F1151S
F1251S**

NOMINAL SIZE	DIMENSION (mm)		PCS	
	L	H	Carton	Case
1/2"	52	38	160	400
3/4"	59	40	120	300
1"	69	45	72	180
1 1/4"	79	51	60	150
1 1/2"	89	55	32	100
2"	109	67	24	60
2 1/2"	135	84	12	32
3"	160	96	6	24
4"	190	113	4	12

Test pressure : Shell 300PSI (20.7bar)
Seat 200PSI (13.8bar)

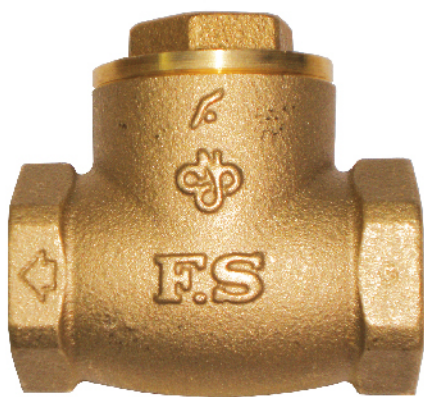

**BRASS FIG : F1151S
BRONZE FIG : F1251S**

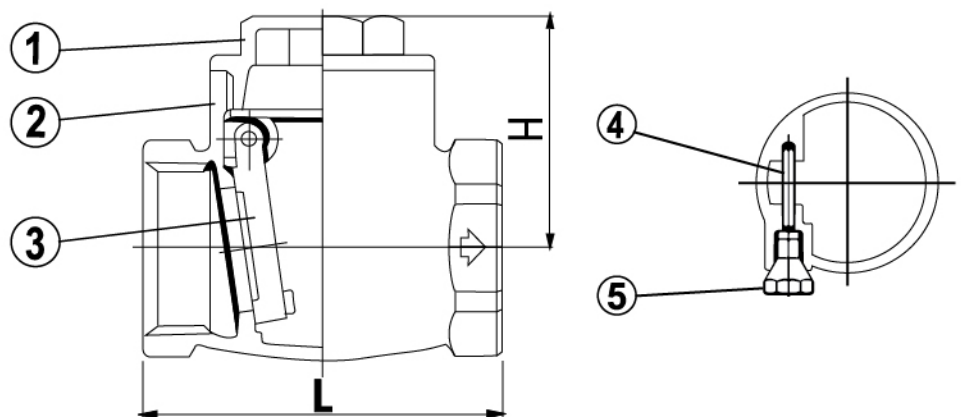

MANUFACTURED BY:

Fu San Machinery Co., Ltd.
22, Lane 89, Sec 4, Chang Mei Road,
Ho-Mei Town, Chang-Hua, Taiwan
Tel : 886 4 756-2131
Fax : 886 4 756-2130
Web : www.fusan.com.tw

DISTRIBUTED BY:

Maxwell Valve Industry Sdn Bhd
Vess Valve Sdn. Bhd. (922423-U)
(799530-K)
No. 26, Jalan Utama 2/28, Taman Perindustrian Puchong Utama,
47140 Puchong, Selangor Darul Ehsan.
Tel : 60(3) 8060 3325 Fax : 60(3) 8060 3341
E-mail : sales@maxwellvalve.com Web : www.maxwellvalve.com