


Approved By :

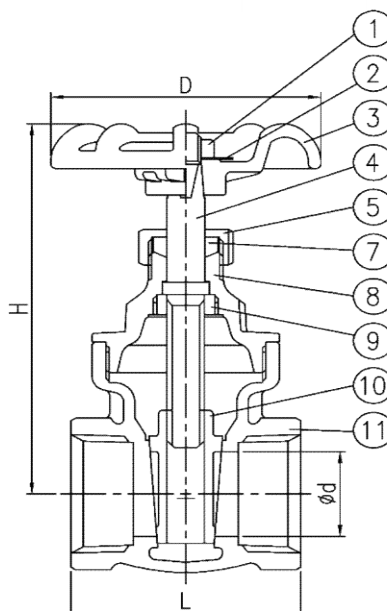

NSF 61-8

SPAN

 SIRIM
CERTIFIED TO :
BS EN 12288:2010

Features

- 200 W.O.G. (PN16)
- Non-rising Stem
- Screwed Ends & CxC
- Conforms to BS EN 12288 : 2010
- Solid Wedge Disc
- Test Pressure :
Shell 348 PSI (24 Bar) (Hydrostatic)
Seat 255 PSI (17.6 Bar) (Hydrostatic)

Dimensions - Millimetres
F1111

Nominal Size (DN)	Dimension (mm)					Pcs Ctn
	L	H	D	d		
15 1/2"	42	73	54	13		120
20 3/4"	46	83	54	19		90
25 1"	50	94	61	24		60
32 1 1/4"	59	114	77	31		40
40 1 1/2"	62	123	77	37		32
50 2"	72	148	83	49		20
65 2 1/2"	89	183	105	63		12
80 3"	101	212/210	132/112	75		8
100 4"	116	240/248	172/132	92		4

Nomenclature & Materials

No.	Part	Material	Spec. JIS	Spec. ASTM
1	Wheel Nut	Steel	S10C	AISI-1010
2	Name Plate	Aluminium	A1100P	B209-1100
3	Hand Wheel	Zinc Alloy	ADC12	B85
4	Stem	Brass	C3604B	B16-C36000
5	Packing Nut	Brass	C3604B	B16-C36000 (1/4" ~ 1")
		Cast Brass	C3771B	B124-C37700 (1 1/4" ~ 4")
6	Gland	Brass	C3604B	B16-C36000
7	Gland Packing	Rubber	NBR	NBR
8	Bonnet	Cast Brass	CAC203	B584-C85700
9	Lock Nut	Brass	C3604B	B16-C36000
10	Disc	Cast Brass	CAC203	B584-C85700
11	Body	Cast Brass	CAC203	B584-C85700

Manufactured By :


Fu San Machinery Co. Ltd.

 22 , Lane 89 , Sec 4 ,
Chan Mei Road, Ho-Mei Town ,
Chan Hua , Taiwan .
Tel : 886 4756 - 2131
Fax : 886 4756 - 2130
Web : www.fusan.com.tw

Distributed By :


Maxwell Valve Industry Sdn Bhd (799530-K)

Vess Valve Sdn Bhd (922423-U)

 No.26 , Jalan Utama 2/28 ,
Taman Perindustrian Puchong Utama.
47140 Puchong , Selangor Darul Ehsan , Malaysia
Tel : 60(3) 8060 3325
Fax : 60(3) 8060 3341
E-mail : sales@maxwellvalve.com
Web : www.maxwellvalve.com